

## Seismic Rack Cabinet



Canovate® seismic cabinets are designed and manufactured according to structural performance criteria set by Bell Core NEBS requirements for installation in Earthquake Risk Zone 4 areas. Most of the accessories can be mounted within seismic cabinets. Use of a floor anchor kit is highly recommended. This cabinet provides easy access to equipment via a removable roof, sides and front/rear doors.

### Technical Features

|                            |  |
|----------------------------|--|
| <b>Material</b>            | Frame; Anodized Aluminium extrusion profiles<br>Other parts: 1,2 and 2 mm steel                              |
| <b>Color</b>               | RAL 7035 or RAL 9005   |
| <b>Maximum Static Load</b> | Up to 2000 kg.   |
| <b>Finish</b>              | Doors, side panels, top and bottom covers:<br>Electrostatic Powder Paint,<br>19" mounting rails: Zinc-plated |

### Highlights

- Aluminium Frame Structure with 2000kg carrying capacity
- Steel reinforced cross-bars in each side of the cabinet including top and bottom
- Chassis is designed to bolt direct into floor with seismic rated fasteners
- Perforated front and rear doors
- Solid Side Panels
- Internal top sheet
- 2 Pairs of depth adjustable 19" Mounting Rails
- 2 Pairs of Adjustable Feet
- Front Door with Swinghandle Multi point-Espagnolette
- Zone 4, UL Certificated, RoHS and TS EN 61587-1 compliant





Stabilizer for ceiling



Stabilizer for raised floor



**CERTIFIED**

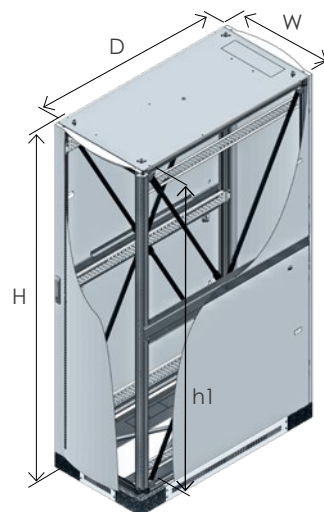

### Order Information

| Height U | Outer Width (W) mm | Outer Depth (D) mm | Outer Height (H) mm | Inner Width (w1) mm | Inner Depth (d1) mm | Inner Height (h1) mm | 19" Rails Adjustable Depth Range (c) | Weight kg | Part No     |
|----------|--------------------|--------------------|---------------------|---------------------|---------------------|----------------------|--------------------------------------|-----------|-------------|
| 42U      | 600                | 1000               | 2033                | 503                 | 950                 | 1898                 | 129-829                              | 146       | CPB-X-4260A |
| 42U      | 600                | 1200               | 2033                | 503                 | 1150                | 1898                 | 129-1029                             | 171       | CPB-X-4262A |
| 42U      | 800                | 800                | 2033                | 703                 | 750                 | 1898                 | 129-629                              | 157       | CPB-X-4288A |
| 42U      | 800                | 1000               | 2033                | 703                 | 950                 | 1898                 | 129-829                              | 162       | CPB-X-4280A |
| 42U      | 800                | 1200               | 2033                | 703                 | 1150                | 1898                 | 129-1029                             | 186       | CPB-X-4282A |

X (Color code): 7:RAL 7035 Light Grey, 9:RAL 9005 Black